
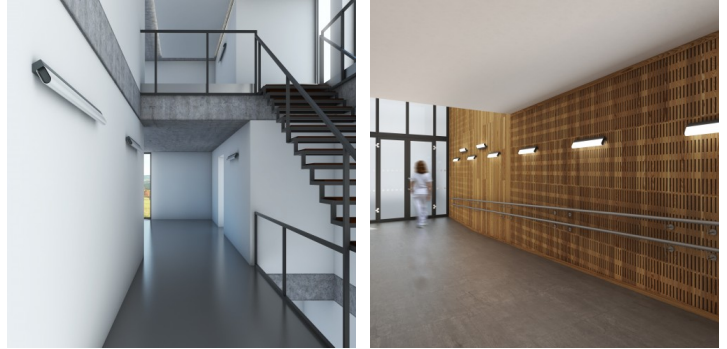


AULA AU3.L1.1500.XY

Typ: Wandleuchte

Lampenschirm: Acrylglas

Leuchte: lackiertes Stahlblech RAL 9016 (.41), RAL 7012 (.47), RAL Argento dorato (.70), RAL Copper (.72), RAL Bronze (.73), RAL Brass (.74)



| W | K | Module luminous flux lm | Luminaire luminous flux lm | A | B | C | DALI 2 | IK06 | IP20 | Bluetooth | Track System | Sádrokarton | Weight |
|----|------|-------------------------|----------------------------|------|-----|----|--------|------|------|-----------|--------------|-------------|--------|
| 51 | 3000 | 6745 | 6338 | 1500 | 120 | 95 | M | - | - | Q* | - | - | 4000 |

Lucis AU3.L1.1500.X AULA LED / LDC (Polar)

Spannung: 230V

IK Code: IK06

Vorschalgerät: Driver

CRI: >90

LED-Lebensdauer: L80/F10 50000 Stunden

Watt: 51 W

Farbtemperatur: 3000 K

Module luminous flux: 6745 lm

Luminaire luminous flux: 6338 lm

A: 1500 mm

B: 120 mm

C: 95 mm

Dali 2: Verfügbar

Bewegungsmelder: Nicht Verfügbar

Notlichtmodul: Nicht Verfügbar

Bluetooth-Steuerung: Verfügbar auf Anfrage

Track-System: Nicht Verfügbar

Sádrokarton: Nicht Verfügbar

Gewicht: 4000 g

Luminaire: Lucis AU3.L1.1500.X AULA LED
Lamps: 1 x LED G6

