AULA AU1.L1.1200.XY

Type: ceiling and wall lamp
Lampshade: acrylic glass
Light body: painted steel plate RAL 9016 (.41), RAL 7012 (.47), RAL Argento dorato (.70), RAL Copper (.72), RAL Bronze (.73), RAL Brass (.74)



W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2						
42	3000	5704	5359	1200	125	50	M	–	–	–	–	–	3000

Lucis AU1.L1.1200.X AULA LED / LDC (Polar)

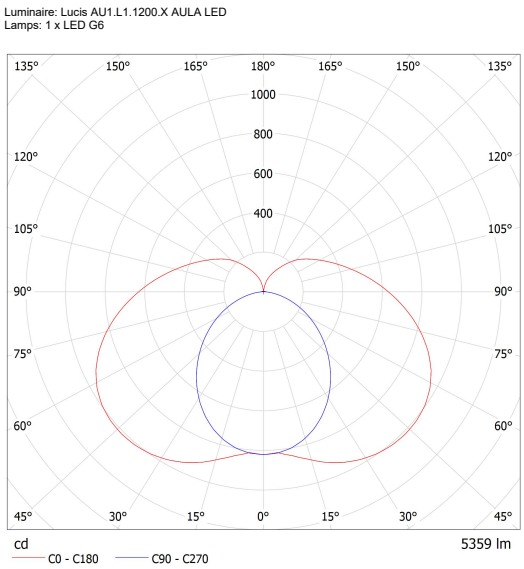

Voltage: 230V
IK code: IK06
Ballast: Driver
CRI: >90
LED life: L80/F10 50000 hours
Watt: 42 W
Color temperature: 3000 K
Module luminous flux: 5704 lm
Luminaire luminous flux: 5359 lm
A: 1200 mm
B: 125 mm
C: 50 mm
Dali 2: Available
Motion sensor: Not available
Emergency module: Not available
Bluetooth control: Not available
Track system: Not available
Sádrokarton: Not available
Weight: 3000 g