
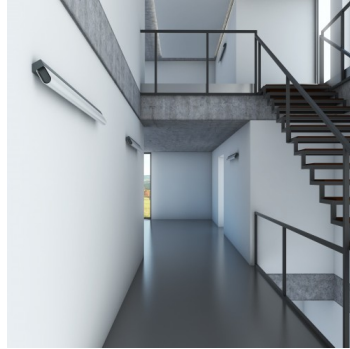


AULA AU3.L3.1500.XY

Typ: Wandleuchte

Lampenschirm: Acrylglas

Leuchte: lackiertes Stahlblech RAL 9016 (.41), RAL 7012 (.47), RAL Argento dorato (.70), RAL Copper (.72), RAL Bronze (.73), RAL Brass (.74)

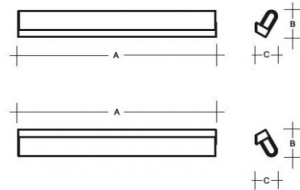

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	IK06	IP20	Bluetooth	Track-System	Sádrokarton	Weight
26,5	3000	3670	3448	1500	120	95	M	-	-	Q*	-	-	4000

Lucis AU3.L3.1500.X AULA LED / LDC (Polar)

Spannung: 230V

IK Code: IK06

Vorschalgerät: Driver

CRI: >90

LED-Lebensdauer: L80/F10 50000 Stunden

Watt: 26,5 W

Farbtemperatur: 3000 K

Module luminous flux: 3670 lm

Luminaire luminous flux: 3448 lm

A: 1500 mm

B: 120 mm

C: 95 mm

Dali 2: Verfügbar

Bewegungsmelder: Nicht Verfügbar

Notlichtmodul: Nicht Verfügbar

Bluetooth-Steuerung: Verfügbar auf Anfrage

Track-System: Nicht Verfügbar

Sádrokarton: Nicht Verfügbar

Gewicht: 4000 g

Luminaire: Lucis AU3.L3.1500.X AULA LED
Lamps: 1 x LED G6

