
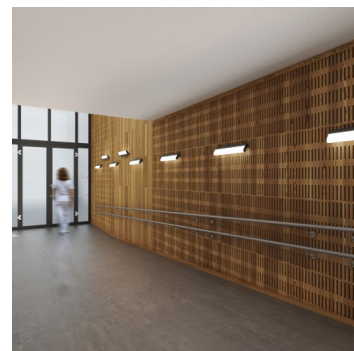
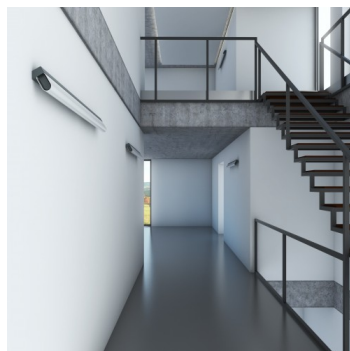


AULA AU3.L4.1500.XY

**Typ:** Wandleuchte

**Lampenschirm:** Acrylglas

**Leuchte:** lackiertes Stahlblech RAL 9016 (.41), RAL 7012 (.47), RAL Argento dorato (.70), RAL Copper (.72), RAL Bronze (.73), RAL Brass (.74)

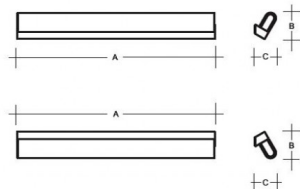

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	IK06	IP20	Bluetooth	Track-System	Sádrokarton	Weight
26,5	4000	3815	3585	1500	120	95	M	-	-	Q*	-	-	4000

Lucis AU3.L4.1500.X AULA LED / LDC (Polar)

**Spannung:** 230V

**IK Code:** IK06

**Vorschalgerät:** Driver

**CRI:** >90

**LED-Lebensdauer:** L80/F10 50000 Stunden

**Watt:** 26,5 W

**Farbtemperatur:** 4000 K

**Module luminous flux:** 3815 lm

**Luminaire luminous flux:** 3585 lm

**A:** 1500 mm

**B:** 120 mm

**C:** 95 mm

**Dali 2:** Verfügbar

**Bewegungsmelder:** Nicht Verfügbar

**Notlichtmodul:** Nicht Verfügbar

**Bluetooth-Steuerung:** Verfügbar auf Anfrage

**Track-System:** Nicht Verfügbar

**Sádrokarton:** Nicht Verfügbar

**Gewicht:** 4000 g

Luminaire: Lucis AU3.L4.1500.X AULA LED  
Lamps: 1 x LED G6

