
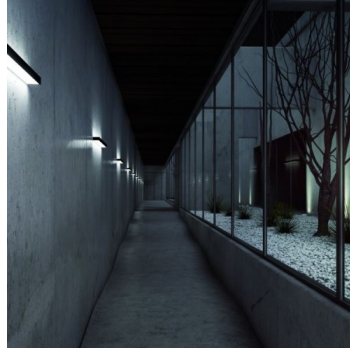


IZAR II I2.L3.1200.XY

Type: wall lamp

Lampshade: acrylic glass in combination with acrylic glass white (.92), black (.93) or stainless steel (.83)

Light body: white painted steel plate



W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	IK06	IP20	LED	CRI >90	Weight	
20,2	3000	2800	2494	1200	80	40	M	-	P*	Q*	-	-	2600

Lucis I2.L3.1200.X IZAR II LED / LDC (Polar)

Voltage: 230V

IK code: IK06

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 20,2 W

Color temperature: 3000 K

Module luminous flux: 2800 lm

Luminaire luminous flux: 2494 lm

A: 1200 mm

B: 80 mm

C: 40 mm

Dali 2: Available

Motion sensor: Not available

Emergency module: Available on inquiry

Bluetooth control: Available on inquiry

Track system: Not available

Sádrokarton: Not available

Weight: 2600 g

Luminaire: Lucis I2.L3.1200.X IZAR II LED
Lamps: 1 x LED G6

