

POLARIS ZKS ZKS.L2.200.XY



Type: suspension lamp

Lampshade: white, hand-blown, three-layered glass, satin opal matt

Metal parts: painted steel plate RAL 9003 (.31), RAL 9005 (.61), RAL chrom (.77), chrome (.80) or brass (.84)

Pendant: white or black self-carrying conductor reinforced with a steel wire

Driver of the luminaire is placed inside the ceiling rose.




W	K	Module luminous flux lm	Luminaire luminous flux lm	A	C	DALI 2	Motion sensor	Emergency	Bluetooth	Track system	Weight
6,2	4000	869	773	200	2000	M	-	P*	Q*	-	D* IJ* DIALux

Operator
Telephone
Fax
e-Mail

Lucis ZKS.L2.200.X POLARIS ZKS LED / LDC (Polar)

Luminaire: Lucis ZKS.L2.200.X POLARIS ZKS LED
Lamps: 1 x LED G6

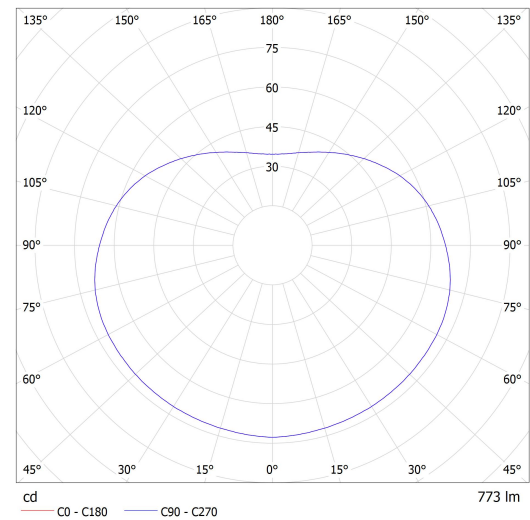

Voltage: 230V

IK code: IK01

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 6,2 W

Color temperature: 4000 K

Module luminous flux: 869 lm

Luminaire luminous flux: 773 lm

A: 200 mm

C: 2000 mm

Dali 2: Available

Motion sensor: Not available

Emergency module: Available on inquiry

Bluetooth control: Available on inquiry

Track system: Not available

Sádrokarton: Available on inquiry

CRI > 90: Available on inquiry

Weight: 2100 g