

POLARIS ZL MAX PE ZL1.P2.1000.XY PE




**Type:** suspension lamp

**Lampshade:** polyethylene opal PE

**Metal parts:** painted steel plate RAL 9003 (.31), RAL chrom (.77) or chrome (.80)

**Pendant:** steel wire suspension with a transparent cable

The luminaire driver is placed right inside the luminaire.

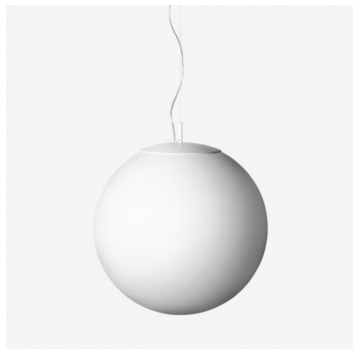

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	C	DALI 2	Motion sensor	Emergency	Bluetooth	Track system	Weight
90,9	4000	13464	11856	1000	2000	M	-	-	Q*	-	28000

**Voltage:** 230V

**Ballast:** Driver

**IK code:** IK10

**ballast:** EVG

**CRI:** >90

**LED life:** L80/F10 50000 hours

**Watt:** 90,9 W

**Color temperature:** 4000 K

**Module luminous flux:** 13464 lm

**Luminaire luminous flux:** 11856 lm

**A:** 1000 mm

**C:** 2000 mm

**Dali 2:** Available

**Motion sensor:** Not available

**Emergency module:** Not available

**Bluetooth control:** Available on inquiry

**Track system:** Not available

**Sádrokarton:** Not available

**Weight:** 28000 g

Lucis ZL1.P2.1000.X PE POLARIS ZL MAX PE LED / LDC (Polar)

Luminaire: Lucis ZL1.P2.1000.X PE POLARIS ZL MAX PE LED  
Lamps: 1 x LED G6

