

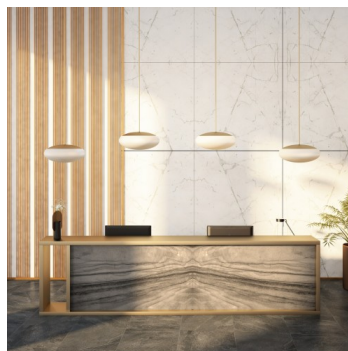


DAPHNE ZT ZT.L6.D450.XY

**Type:** luminaire suspendu

**Abat-jour:** verre blanc, soufflé de manière artisanale, à trois couches, satin opale mat

**Suspension:** en acier peint en blanc RAL 9003 (.31), chromé (.80), en laiton (.84), RAL chrom (.77) ou RAL Argento dorato (.70)



W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	IK 10	IP 20	Bluetooth	Track system	Weight	
21,3	4000	3476	2594	450	200	1000	M	-	P*	Q*	R*	-	5400

Lucis ZT.L6.D450.X DAPHNE LED / LDC (Polar)

**Tension:** 230V

**IK code:** IK01

**Ballaste:** Driver

**CRI:** >90

**La vie de LED:** L80/F10 50000 heures

**Watt:** 21,3 W

**Température Couleur:** 4000 K

**Module luminous flux:** 3476 lm

**Luminaire luminous flux:** 2594 lm

**A:** 450 mm

**B:** 200 mm

**C:** 1000 mm

**Dali 2:** Disponible

**Capteur de mouvement:** Non disponible

**Module d'urgence:** Disponible sur demande

**Contrôle Bluetooth:** Disponible sur demande

**Track system:** Disponible sur demande

**Sádrokarton:** Non disponible

**Poids:** 5400 g

Luminaire: Lucis ZT.L6.D450.X DAPHNE LED  
Lamps: 1 x LED G6

