


SEMILUNA ZT.L2.S200.XY

Type: suspension lamp

Lampshade: white, hand-blown, three-layered glass, satin opal matt

Metal parts: painted steel plate RAL 9003 (.60), RAL 9005 (.61), RAL Bronze (.73) or RAL Chrom (.77)

Pendant: rod

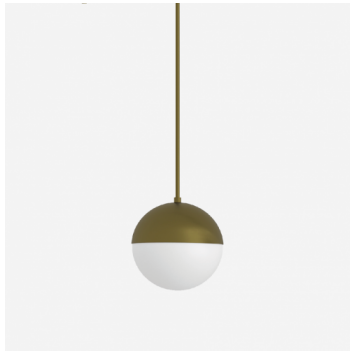

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	C	DALI 2	Ⓜ	Ⓟ	Ⓠ	Ⓡ	Ⓢ	Ⓣ	Ⓤ	Ⓥ	Ⓦ	Ⓧ	Ⓨ	Ⓩ	
8,1	4000	1179	708	200	1000	M	-	P*	Q*	-	-	-	-	-	-	-	-	-	2200

Voltage: 230V

IK code: IK01

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 8,1 W

Color temperature: 4000 K

Module luminous flux: 1179 lm

Luminaire luminous flux: 708 lm

A: 200 mm

C: 1000 mm

Dali 2: Available

Motion sensor: Not available

Emergency module: Available on inquiry

Bluetooth control: Available on inquiry

Track system: Not available

Sádrokarton: Not available

Weight: 2200 g

Lucis ZT.L2.S200.X SEMILUNA LED / LDC (Polar)

Luminaire: Lucis ZT.L2.S200.X SEMILUNA LED
Lamps: 1 x LED G6

