

GEO ZK2.L1.GA.61Y


Type: suspension lamp

Lampshade: white, hand-blown, three-layered glass, satin opal matt

Metal parts: painted steel plate RAL 9005 (.61)

Pendant: black cable

Mounting options: ceiling/ceiling (A), ceiling/track (B), track/track (C) or plasterboard (D)

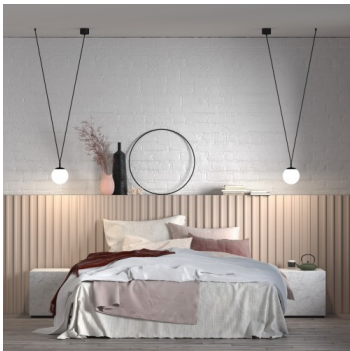

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	D	DALI 2	☑	☑	☑	☑	☑	☑
6,2	3000	804	680	400	955	1150	150	M	-	-	-	-	-	1300

Voltage: 230V

IK code: IK01

Ballast: Driver

CRI: >90

LED life: L80/F10 50000 hours

Watt: 6,2 W

Color temperature: 3000 K

Module luminous flux: 804 lm

Luminaire luminous flux: 680 lm

A: 400 mm

B: 955 mm

C: 1150 mm

D: 150 mm

Dali 2: Available

Motion sensor: Not available

Bluetooth control: Not available

Track system: Not available

Sádrokarton: Not available

Weight: 1300 g

Lucis ZK2.L1.GA.61_pc(1) GEO LED / LDC (Polar)

Luminaire: Lucis ZK2.L1.GA.61_pc(1) GEO LED
Lamps: 1 x LED G6

