

CAPSULE ZL.L2.C15.XY

**Type:** suspension lamp



**Lampshade:** white, hand-blown, three-layered glass, satin opal matt

**Metal parts:** painted aluminum – RAL 7012 (.47), RAL 9003 (.60), RAL 9005 (.61), RAL 3012 (.75) or RAL 6011 (.76)

**Pendant:** wire suspension with white or black cable

The beam angle of the lighting source can be changed by fixation of the lampshade, see positions A, B or C.

The position of the glass sphere does not change, only the level of the aluminum shade can be adjusted.

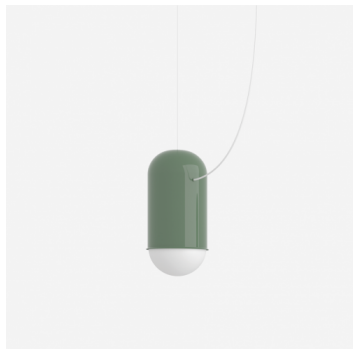

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	DALI 2	Icon 1	Icon 2	Icon 3	Icon 4	Icon 5	
6,2	4000	869	522	170	270	2000	M	-	-	-	R*	-	2100

Lucis ZL.L2.C15.X CAPSULE LED / LDC (Polar)

**Voltage:** 230V

**IK code:** IK01

**Ballast:** Driver

**CRI:** >90

**LED life:** L80/F10 50000 hours

**Watt:** 6,2 W

**Color temperature:** 4000 K

**Module luminous flux:** 869 lm

**Luminaire luminous flux:** 522 lm

**A:** 170 mm

**B:** 270 mm

**C:** 2000 mm

**Dali 2:** Available

**Motion sensor:** Not available

**Emergency module:** Not available

**Bluetooth control:** Not available

**Track system:** Available on inquiry

**Sádrokarton:** Not available

**Weight:** 2100 g

Luminaire: Lucis ZL.L2.C15.X CAPSULE LED  
Lamps: 1 x LED G6

