




BOWL S0.K2.B50.Y

**Type:** ceiling and wall lamp

**Lampshade:** white, hand-blown, three-layered glass, satin opal matt

**Light body:** white painted steel plate

The first glass ceiling and wall luminaire, triplex opal matt, with an invisible fixture in the shade of the luminaire allowing clean and direct compositions of opal glass with different types of materials.

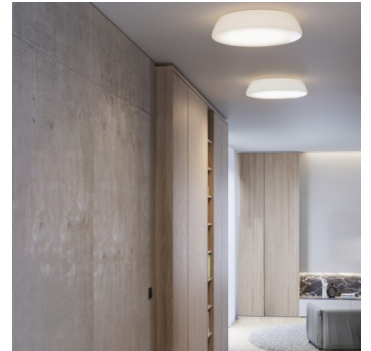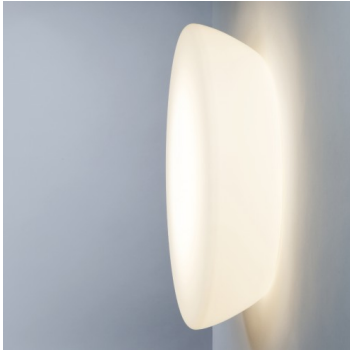

W	K	Module luminous flux lm	Luminaire luminous flux lm	A	B	C	D	DALI 2	🏃	🚪	📶	📄	👤	
30,3	4000	5009	3799	505	407	110	332	M	O*	P*	Q*	-	-	7300

**Voltage:** 230V

**IK code:** IK01

**Ballast:** Driver

**CRI:** >90

**LED life:** L80F10>72000 hodin

**Watt:** 30,3 W

**Color temperature:** 4000 K

**Module luminous flux:** 5009 lm

**Luminaire luminous flux:** 3799 lm

**A:** 505 mm

**B:** 407 mm

**C:** 110 mm

**D:** 332 mm

**Dali 2:** Available

**Motion sensor:** Available on inquiry

**Bluetooth control:** Available on inquiry

**Track system:** Not available

**Sádrokarton:** Not available

**Weight:** 7300 g

Project 2



Operator  
Telephone  
Fax  
e-Mail

**Lucis S0.K2.B50 BOWL LED / LDC (Polar)**

Luminaire: Lucis S0.K2.B50 BOWL LED  
Lamps: 1 x LED G6

